

SP5

SINGLE-POINT LOAD CELL for platforms 250x400 / 400x600 mm



IP65

Manufactured according to OIML R60 standards

Capacity from 3 kg to 50 kg

- ALUMINUM ALLOY
- COMBINED ERROR $\leq \pm 0.02\%$
- PROTECTION CLASS IP65




CAPACITY	kg	PLATFORM (mm)	NET WEIGHT (kg)	CODE
	3	250 x 400	0.5	SP5-3
	6	250 x 400	0.5	SP5-6
	15	250 x 400	0.5	SP5-15
	30	400 x 600	0.5	SP5-30
	50	400 x 600	0.5	SP5-50

SP5

SINGLE-POINT LOAD CELL for platforms 250x400 / 400x600 mm

DIMENSIONS (mm)

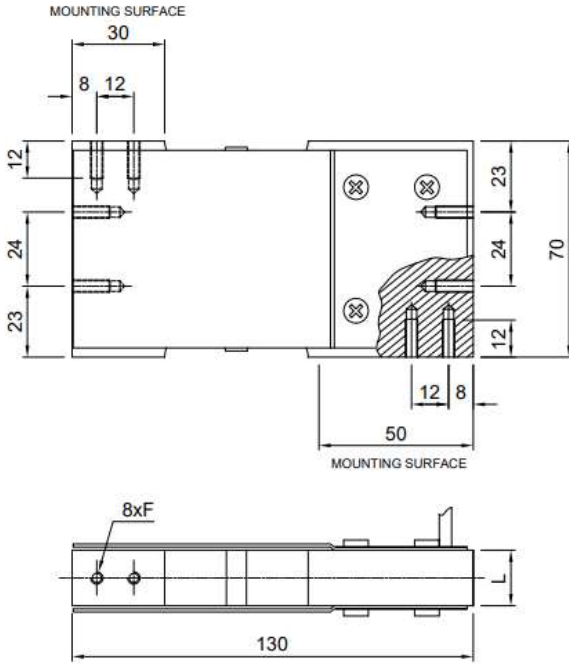

	3 - 6 - 15 kg	30 - 50 kg
L	18	30
F	M4x0.7	M6x1

TECHNICAL FEATURES

Material	Aluminum alloy		
Nominal load (E max)	3 - 6 - 15 - 30 - 50 kg		
Combined error	≤±0.02%		
Protection class	IP65		
Rated output	2 mV/V ±10%	Input resistance	410 Ω ±10
Temperature effect on zero	0.0025% °C	Output resistance	350 Ω ±3
Temperature effect on span	0.0025% °C	Zero balance	±2%
Compensated temperature range	-10 °C / +40 °C	Insulation resistance	>2000 MΩ
Operating temperature range	-20 °C / +60 °C	Safe overload (% of full scale)	120%
Creep at nominal load in 30 minutes	0.025%	Ultimate overload (% of full scale)	200%
Max supply voltage without damage	15 V	Deflection at nominal load	0.5 mm

ELECTRICAL CONNECTIONS

Cable length	3 m
Cable diameter	4 mm
Cores	6 x 0.20 mm ²

